



### FEATURES

- Excellent linearity
- Extremely low noise
- Excellent return loss properties


### APPLICATIONS

- Single module line extender in CATV systems operating in the 40 to 750 MHz frequency range.

### DESCRIPTION

Hybrid high dynamic range amplifier module operating at a supply voltage of 24 V (DC) in a SOT115J package. The Module consists of two cascaded stages both in cascode configuration.

PIN	DESCRIPTION
1	input
2	common
3	common
5	+VB
7	common
8	common
9	output

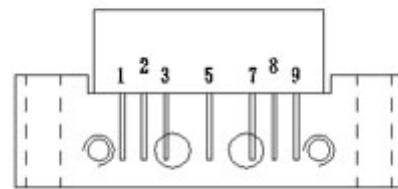

Side view

Fig. 1 Simplified outline

### QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
$G_p$	power gain	$f=50\text{MHz}$	22.0	23.5	dB
		$f=750\text{MHz}$	23.0	-	dB
$I_{tot}$	total current consumption (DC)	$V_B=24\text{V}$	210	245	mA

### LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	MIN.	MAX.	UNIT
V <sub>B</sub>	supply voltage	-	26	V
V <sub>i</sub>	RF input voltage	-	45	dBmV
T <sub>stg</sub>	storage temperature	-20	+100	
T <sub>mb</sub>	mounting base operating temperature	-20	+100	

 **CHARACTERISTICS**

Bandwidth 40 to 750 MHz; V<sub>B</sub>=24V; T<sub>case</sub>=30°C ; Z<sub>s</sub>=Z<sub>L</sub>=75Ω

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
G <sub>p</sub>	power gain	f=50MHz	22.0	23.5	dB
		f=750MHz	23.0	-	dB
SL	slope cable equivalent	f=40 to 750 MHz	0.5	2.0	dB
FL	flatness of frequency response	f=40 to 750 MHz	-	±0.3	dB
S <sub>11</sub>	input return losses	f=40 to 80 MHz	18	-	dB
		f=80 to 160 MHz	18	-	dB
		f=160 to 320 MHz	18	-	dB
		f=320 to 640 MHz	18	-	dB
		f=640 to 750 MHz	16	-	dB
S <sub>22</sub>	output return losses	f=40 to 80 MHz	16	-	dB
		f=80 to 160 MHz	16	-	dB
		f=160 to 320 MHz	16	-	dB
		f=320 to 640 MHz	16	-	dB
		f=640 to 750 MHz	16	-	dB
CTB	composite triple beat	60 channels flat; Vo=44dBmV; measured at 543.25 MHz	-	-63	dB
X <sub>mod</sub>	cross modulation	60 channels flat; Vo=44dBmV; measured at 49.75 MHz	-	-64	dB
CSO	composite second order distortion	60 channels flat; Vo=44dBmV; measured at 544.25 MHz	-	-62	dB
d <sub>2</sub>	second order distortion	Note1	-	-64	dB
Vo	output voltage	Dim= -60 dB; note 2	59	-	dBmV
F	noise figure	f=750MHZ	-	6.5	dB

$I_{tot}$	total current consumption (DC)	Note 3	210	245	mA
-----------	-----------------------------------	--------	-----	-----	----

**Note :**

1.  $f_p=49.75\text{MHz}$ ;  $V_p=44\text{dBmV}$ ;  
 $f_q=695.25\text{MHz}$ ;  $V_q=44\text{dBmV}$ ;  
measured at  $f_p+f_q=745\text{MHz}$ .
2. Measured according to DIN45004B;  
 $f_p=735.25\text{MHz}$ ;  $V_p=V_o$ ;  
 $f_q=743.25\text{MHz}$ ;  $V_q=V_o-6\text{dB}$ ;  
 $f_r=745.25\text{MHz}$ ;  $V_r=V_o-6\text{dB}$ ;  
measured at  $f_p+f_r-f_q=737.25\text{MHz}$ .
3. The module normally operates at  $V_B=24\text{V}$ , but is able to withstand supply transients up to 28 V.



## PACKAGE OUTLINE

Rectangular single-ended package; aluminum flange; 2 vertical mounting holes;  
2×6-32 UNC AND 2 extra horizontal mounting holes; 7 gold-plated in-line leads

