

750MHz 34dB Gain CATV forward Integrated Circuit

★ FEATURES

- Excellent linearity
- Excellent distortion performance
- High gain
- Extremely low noise
- Excellent return loss properties

★ APPLICATIONS


For CATV systems operating over a frequency range of 40 to 750MHz.

PINNING — SOT115J

PIN	DESCRIPTION
1	Input
2	Common
3	Common
5	+VB
7	Common
8	Common
9	Output

★ DESCRIPTION

KF788C in a SOT115J package, operating at a supply voltage of 24V(DC), and intended for use as a line-extender.

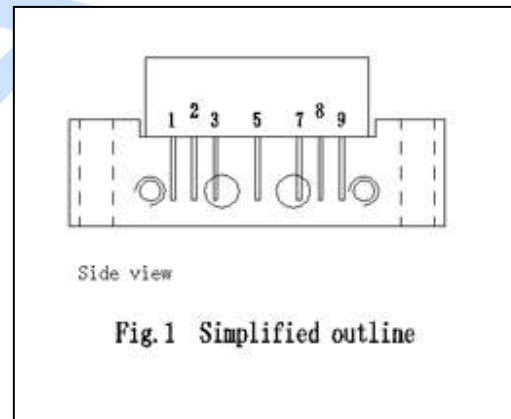

★ QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
G _p	power gain	f=50MHz	33.5	34.0	35.0	dB
		f=750MHz	34.5	-	-	dB
I _{tot}	total current consumption (DC)	VB= +24V	300	310	320	mA

750MHz 34dB Gain CATV forward Integrated Circuit

★ LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	MIN.	MAX.	UNIT
VB	supply voltage	-	25	V
V _i	RF input voltage	-	55	dBmV
T _{stg}	storage temperature	-40	+100	°C
T _{mb}	operating mounting base temperature	-20	+100	°C

★ CHARACTERISTICS

Bandwidth 40 to 750MHz; VB = +24 V; Tmb =25 °C; ZS =ZL =75 Ω 。

SYMBOL	PARAMETER	CONDITIONS	MIN	Typ	MAX	UNIT
Gp	power gain	f=50MHz	33.5	34.0	35.0	dB
SL	slope cable equivalent	f=50 to 750MHz	1.0	2.0	3.0	dB
FL	flatness of frequency response	f=50 to 750MHz	-	-	±0.4	dB
S11	input return losses	f=40 to 550MHz	18	-	-	dB
		f=550 to 750MHz	18	-	-	
S22	output return losses	f=40 to 550 MHz	16	-	-	dB
		f=550 to 750MHz	16	-	-	
CTB	composite triple beat	84channels Flat output level across the band. Vo=40dBmV at 743.25 MHz,	-	-64	-	dB
CSO	composite second order distortion		-	-66	-	dB
Xmod	cross modulation		-	-65	-	dB
F	noise figure	f=750MHz	-	-	7.5	dB
I _{tot}	total current consumption (DC)	VB=+24V	300	310	320	mA


750MHz 34dB Gain CATV forward Integrated Circuit

★ PACKAGE OUTLINE

Rectangular single-ended package; aluminium flange; 2 vertical mounting holes;

2 x 6-32 UNC and 2 extra horizontal mounting holes; 7 gold-plated in-line leads

SOT115J

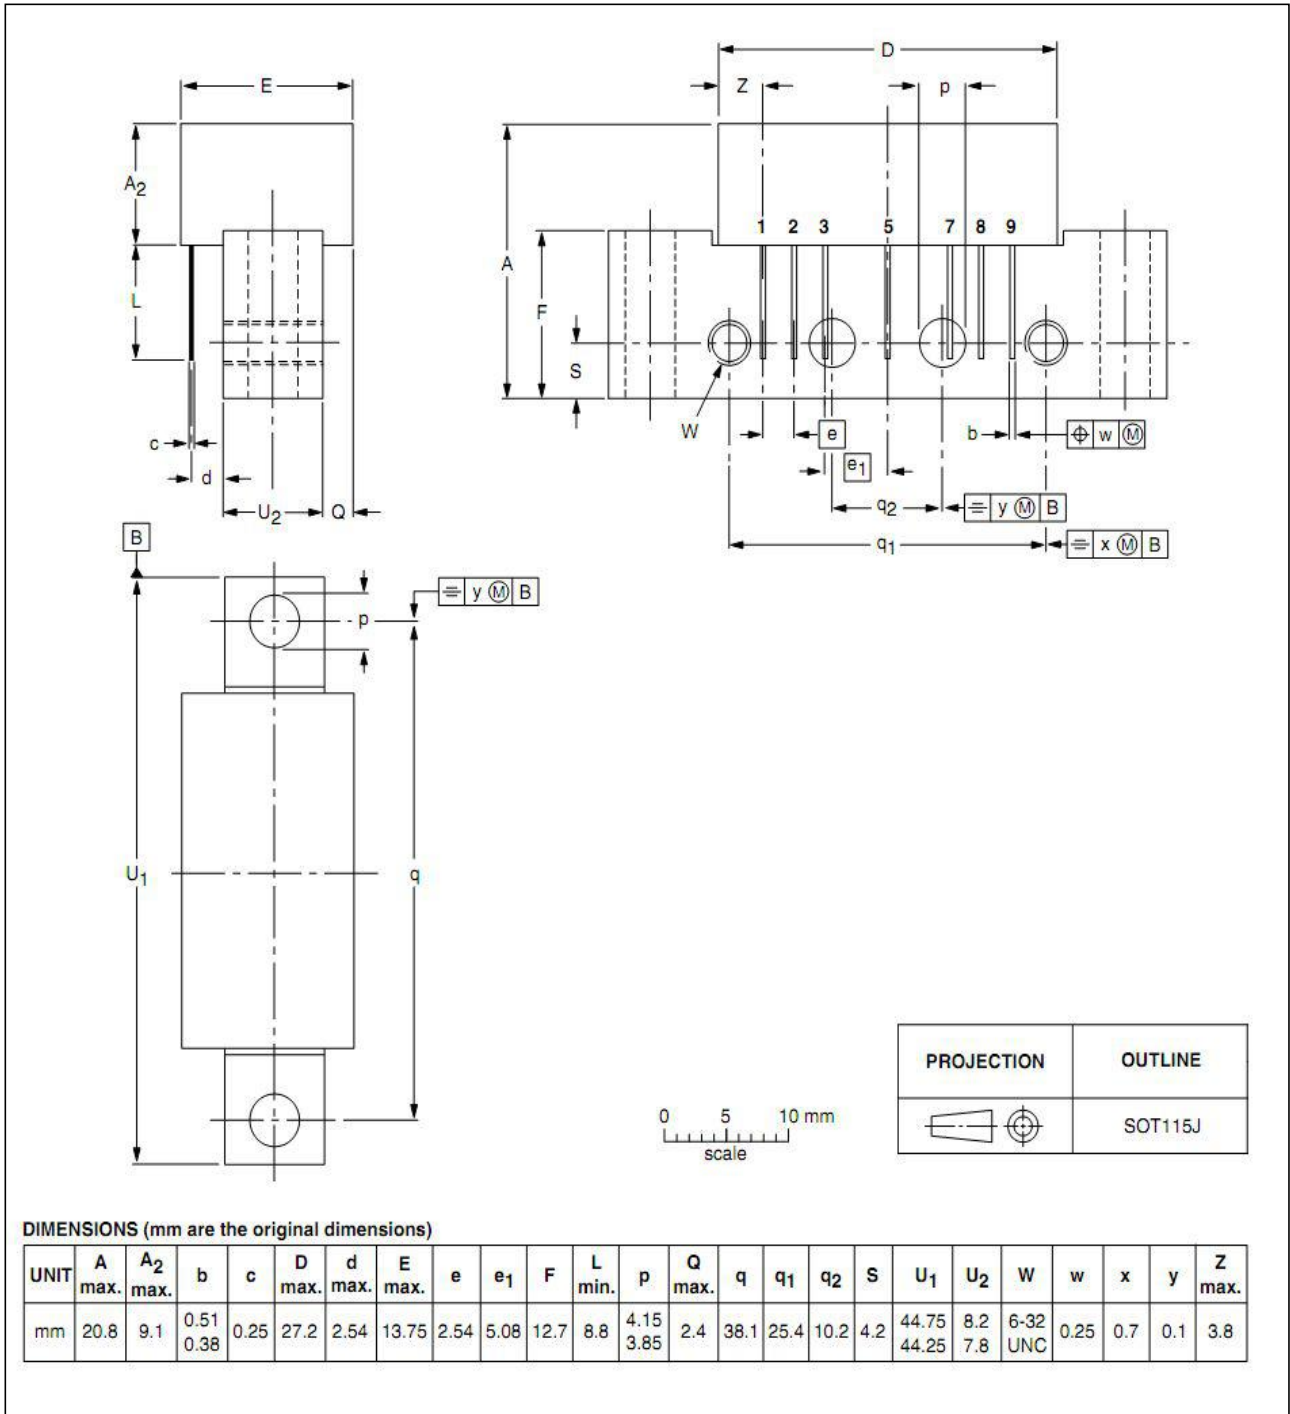

UNIT: mm