

860MHz 18dB Gain CATV forward Integrated Circuit

★ FEATURES

- Excellent linearity
- Excellent distortion performance
- High gain
- Extremely low noise
- Excellent return loss properties

★ APPLICATIONS


For CATV systems operating over a frequency range of 40 to 860MHz.

PINNING — SOT115J

PIN	DESCRIPTION
1	Input
2	Common
3	Common
5	+VB
7	Common
8	Common
9	Output

★ DESCRIPTION

KF885C in a SOT115J package, operating at a supply voltage of 24V(DC), and intended for use as a line-extender.

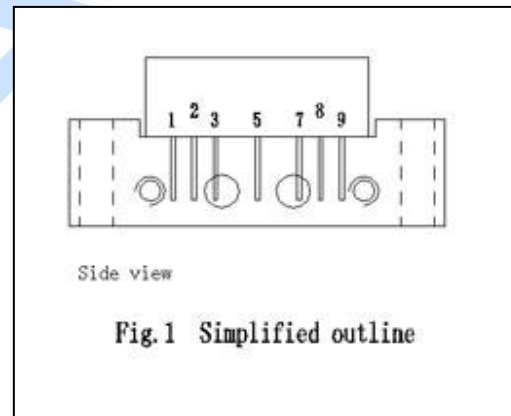

★ QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
G _p	power gain	f=50MHz	18.0	18.8	20.0	dB
		f=860MHz	18.7	-	-	dB
I _{tot}	total current consumption (DC)	VB= +24V	200	210	220	mA

860MHz 18dB Gain CATV forward Integrated Circuit

★ LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	MIN.	MAX.	UNIT
VB	supply voltage	-	25	V
V _i	RF input voltage	-	60	dBmV
T _{stg}	storage temperature	-20	+100	°C
T _{mb}	operating mounting base temperature	-40	+100	°C

★ CHARACTERISTICS

Bandwidth 40 to 860MHz; VB = +24 V; T_{mb} = 25 °C; Z_S = Z_L = 75 Ω .


SYMBOL	PARAMETER	CONDITIONS	MIN	Typ	MAX	UNIT
G _p	power gain	f=50MHz	18.0	18.8	20.0	dB
SL	slope cable equivalent	f=50 to 860MHz	0.7	1.2	2.2	dB
FL	flatness of frequency response	f=50 to 860MHz	-	-	±0.4	dB
S ₁₁	input return losses	f=50 to 700MHz	18	-	-	dB
		f=700 to 860MHz	16	-	-	
S ₂₂	output return losses	f=40 to 700 MHz	16	-	-	dB
		f=700 to 860MHz	16	-	-	
CTB	composite triple beat	84channels Flat output level across the band. Vo=40dBmV at 743.25 MHz,	-	-64	-	dB
CSO	composite second order distortion		-	-66	-	dB
X _{mod}	cross modulation		-	-65	-	dB
F	noise figure	f=860MHz	-	-	7.5	dB
I _{tot}	total current consumption (DC)	VB=+24V	200	210	220	mA

860MHz 18dB Gain CATV forward Integrated Circuit

★ PACKAGE OUTLINE

Rectangular single-ended package; aluminium flange; 2 vertical mounting holes;
2 x 6-32 UNC and 2 extra horizontal mounting holes; 7 gold-plated in-line leads

SOT115J

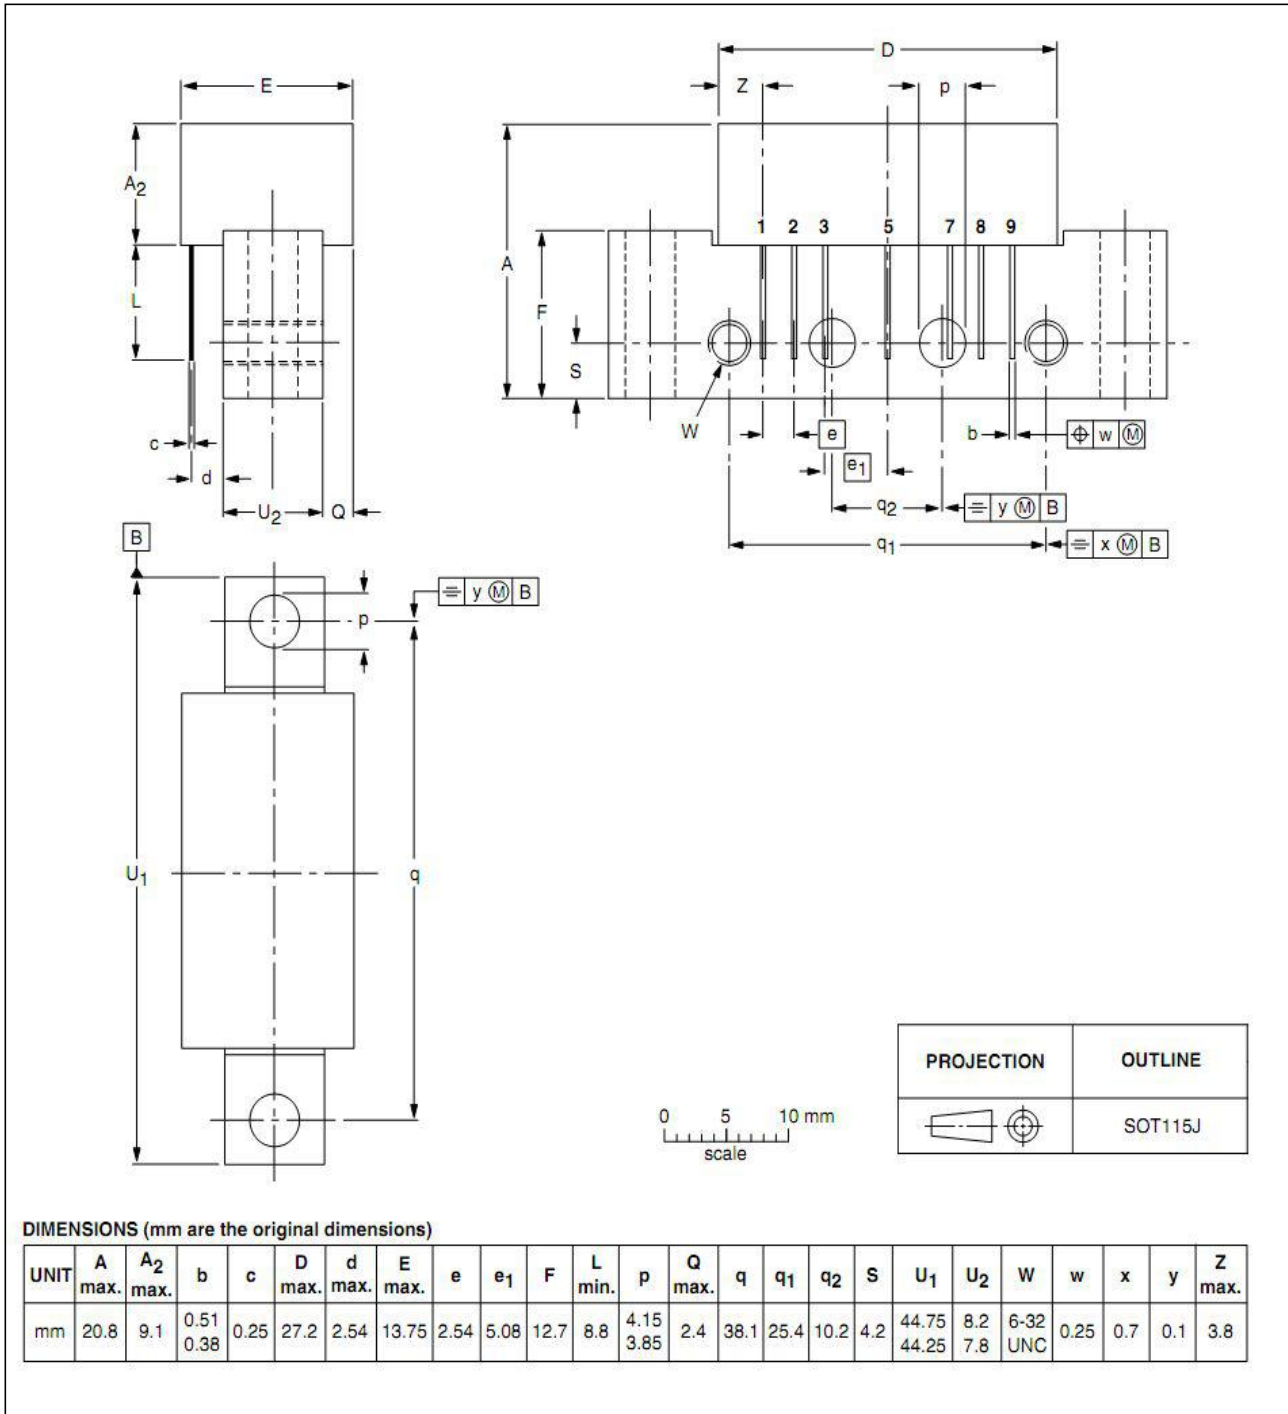

UNIT: mm