



FEATURES

- Excellent linearity
- Extremely low noise
- Excellent return loss properties

APPLICATIONS


- Single module line extender in CATV systems operating In the 40 to 860 MHz frequency range.

DESCRIPTION

Hybrid high dynamic range amplifier module operating at a supply voltage of 24 V (DC) in a SOT115J package. The Module consists of two cascaded stages both in cascode Configuration.

PINNING - SOT115U

PIN	DESCRIPTION
1	Input
2	Common
3	Common
5	+VB
7	Common
8	Common
9	Output

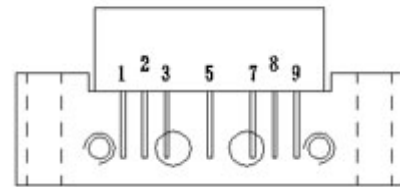

Side view

Fig.1 Simplified outline

QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
G _p	Power gain	f=50MHz	17.5	19	dB
		f=860MHz	19	-	dB
I _{tot}	Total current consumption (DC)	V _B =24V	190	240	mA

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (1EC 134).

SYMBOL	PARAMETER	MIN.	MAX.	UNIT
V _B	Supply voltage	-	25	V
V _B	RF input voltage	-	45	dBmV
T _{stg}	Storage temperature	-20	+100	
T _{mb}	Mounting base operating temperature	-20	+100	

 **CHARACTERISTICS**

Bandwidth 40 to 860 MHz; V_B=24V; T_{case}=30°C ; Z_s=Z_L=75Ω

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
G _p	Power gain	f=50MHz	17.5	19	dB
		f=860MHz	19	-	dB
SL	Slope cable equivalent	f=40 to 860 MHz	0.5	2.5	dB
FL	Flatness of frequency response	f=40 to 860 MHz	-	±0.5	dB
S ₁₁	Input return losses	f=40 to 80 MHz	18	-	dB
		f=80 to 160 MHz	18	-	dB
		f=160 to 320 MHz	18	-	dB
		f=320 to 750 MHz	18	-	dB
		f=750 to 860 MHz	16	-	dB
S ₂₂	Output return losses	f=40 to 80 MHz	14	-	dB
		f=80 to 160 MHz	14	-	dB
		f=160 to 320 MHz	14	-	dB
		f=320 to 750 MHz	14	-	dB
		f=750 to 860 MHz	12	-	dB
CTB	Composite triple beat	84 channels flat; V _o =44dBmV; measured at 743.25 MHz	-	-57	dB
X _{mod}	Cross modulation	84 channels flat; V _o =44dBmV; measured at 49.75 MHz	-	-61	dB
CSO	Composite second order distortion	84 channels flat; V _o =44dBmV; measured at 744.25 MHz	-	-62	dB
d ₂	Second order distortion	Note1	-	-64	dB
V _o	Output voltage	Dim= -60 dB; note 2	57.5	-	dBmV

F	Noise figure	f=860MHZ	-	6.5	dB
PM	positive match	f=40 MHz to 2 GHz	-	3	dB
I _{tot}	Total current consumption (DC)	Note 3	190	240	mA

Note :

1. fp=49.75MHz; Vp=44dBmV;
fq=8.7.25MHz; Vq=44dBmV;
measured at fp+fq=857.00MHz.
2. Measured according to DIN45004B;
fp=847.25MHz; Vp=Vo;
fq=855.25MHz; Vq=Vo-6dB;
fr=857.25MHz; Vr=Vo-6dB;
measured at fp+fr-fq=849.25MHz.
3. The module normally operates at VB=24V, but is able to withstand supply transients up to 28 V.

 **PACKAGE OUTLINE**

Rectangular single-ended package; aluminum flange; 2 vertical mounting holes; 2×6-32 UNC AND 2 extra horizontal mounting holes; 7 gold-plated in-line leads

